


# Demolisher


Powerful base machine compatible with demolition front attachment

- Front, upperstructure and undercarriage have been strengthened for increased durability, stability and safety.
- Customers can select the suitable one for work size and job conditions among a wide lineup of models.

## ● Working Range Diagram ●

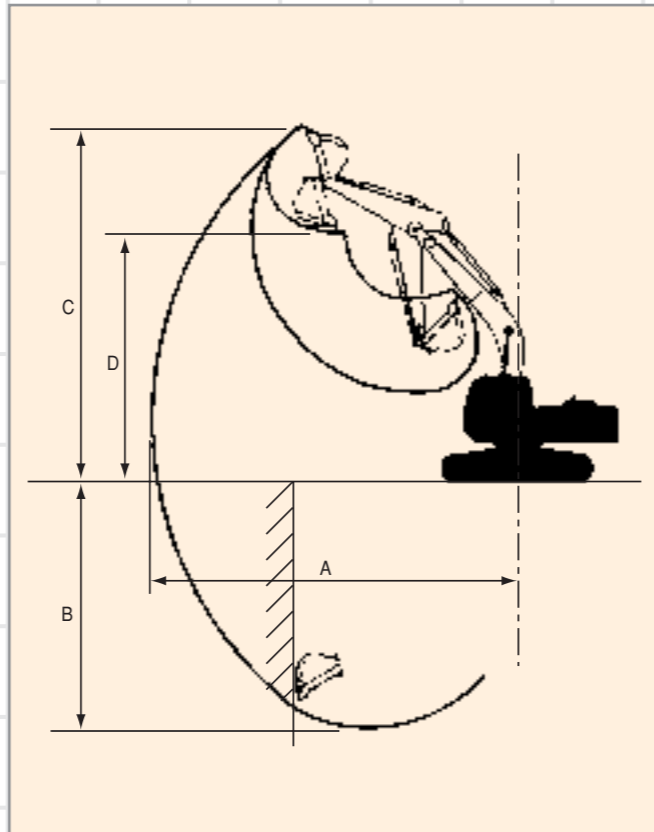

## ■ HG (High Grade) type

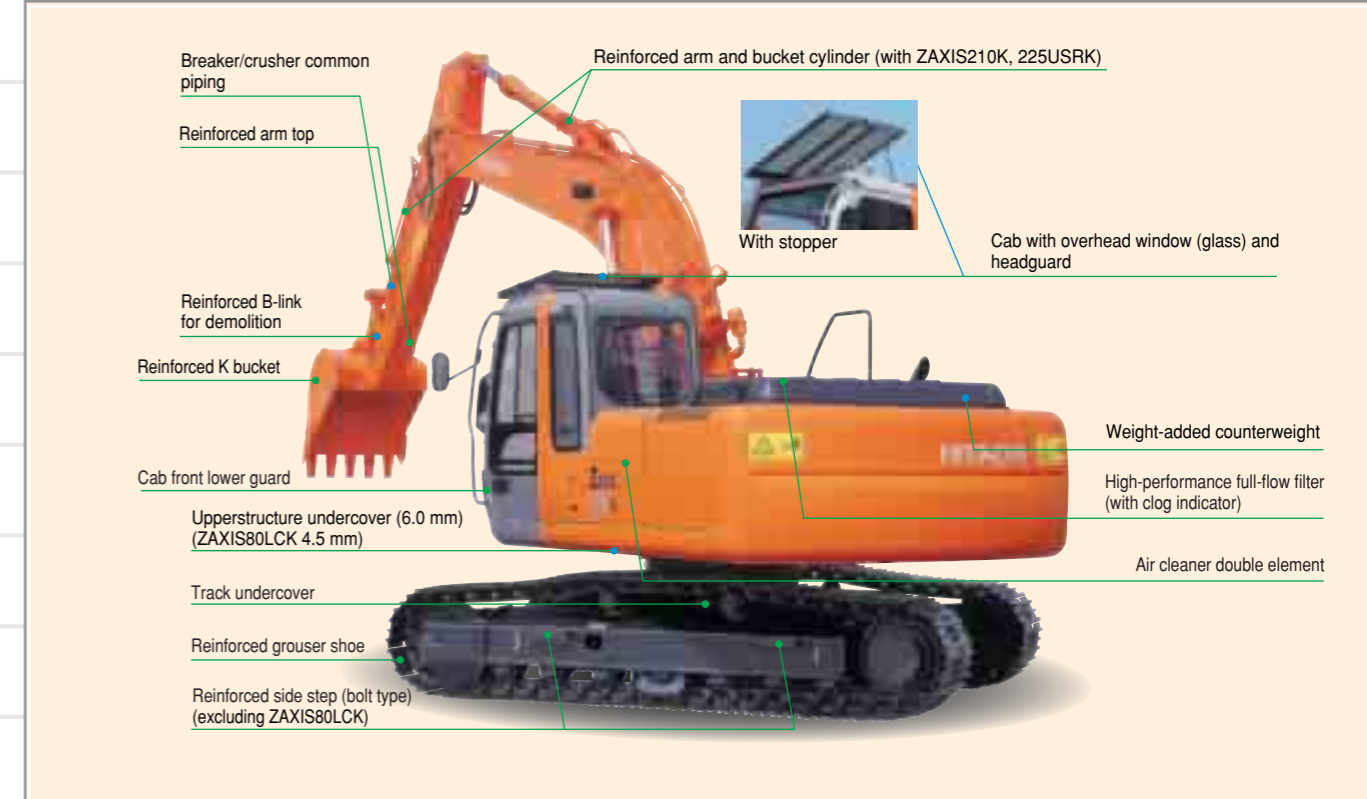

<Note> Equipment and accessories mounted vary with model.

## ● Specifications ●

Applicable Models	ZAXIS80LCK	ZAXIS130K	ZAXIS135USK	ZAXIS210K	ZAXIS210LCK	
	HG type	HG type	HG type	HG type	HG type	
Bucket capacity (PCSA heaped) m <sup>3</sup>	0.28	0.5	0.5	0.8	0.8	
Operating weight kg	7 200	13 000	14 400	21 300	21 800	
Rear-end swing radius mm	1 750	2 130	1 510	2 750	2 750	
Working range	A Max. digging reach mm	7 130	8 270	8 300	9 910	9 910
	B Max. digging depth mm	4 510	5 570	5 530	6 670	6 670
	C Max. cutting height mm	8 220	8 570	9 220	9 600	9 600
	D Max. dumping height mm	6 110	6 160	6 760	6 780	6 780

Applicable Models	ZAXIS240K	ZAXIS240LCK	ZAXIS225USRK	ZAXIS225USRLCK	ZAXIS350K	ZAXIS350LCK
	HG type	HG type	HG type	HG type	HG type	HG type
Bucket capacity (PCSA heaped) m <sup>3</sup>	1.0	1.0	0.8	0.8	1.4	1.4
Operating weight kg	24 800	25 400	22 900	23 400	33 500	34 100
Rear-end swing radius mm	2 940	2 940	1 990	1 990	3 320	3 320
Working range	A Max. digging reach mm	10 270	10 270	9 910	9 910	11 100
	B Max. digging depth mm	6 950	6 950	5 980	5 980	7 380
	C Max. cutting height mm	9 630	9 630	10 380	10 380	10 230
	D Max. dumping height mm	6 760	6 760	7 480	7 480	7 130