


Wheeled Scrap Handlers

Proven job-to-job mobility

- Four outriggers are extended for stable scrap handling.
- The elevated linkage cab always keeps the bucket in operator's sight for efficient, safe operation.



● Working Range Diagram ●

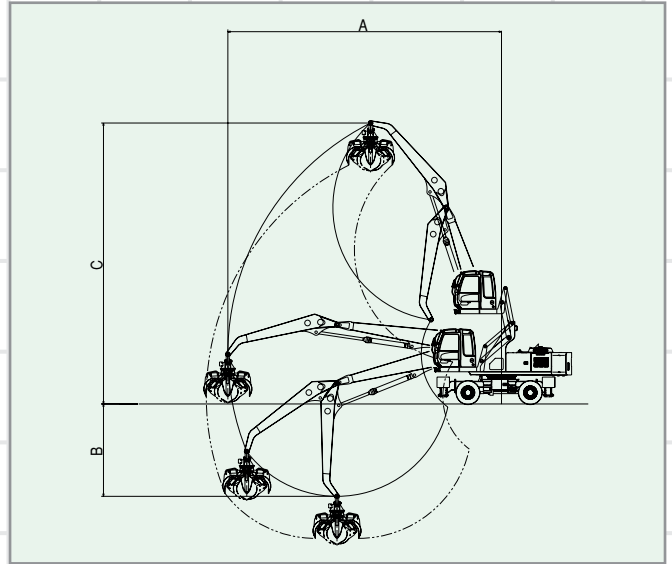

● Specifications ●

Model			ZAXIS210W	ZAXIS300W	ZAXIS350W	
Dimensions	Overall length at transport	mm	10 600	13 400	14 500	
	Overall width at transport	mm	2 500	3 020	3 025	
	Overall height at transport	mm	3 640	3 500	3 520	
	Rear-end swing radius	mm	3 100	3 140	3 470	
	Wheel base	mm	2 750	3 500	3 500	
	Min. ground clearance	mm	340	378	378	
Miscellaneous	*Operating weight	kg	25 300	31 900	34 000	
	Boom	m	6.7	8.7	9.7	
	Arm	m	5.0	5.8	6.7	
	A Max. working radius	mm	12 000	14 260	16 000	
	B Max. working depth	mm	4 070	6 340	8 200	
	C Max. working height	mm	10 700	14 590	16 900	
	Magnet diameter	mm	1 120 Dia.	1 320 Dia.	1 320 Dia.	
	Grapple capacity	m ³	0.4	0.8	0.8	
	Performance	Swing speed	min ⁻¹ (rpm)	13.6 (13.6)	10.6 (10.6)	11.8 (11.8)
		Travel speed	km/h	20.0 / 6.6 / 2.0	14.0 / 4.0	15.0 / 4.2
Gradeability		%	46.0	32.7	32.7	
Engine	Model		Isuzu AA-6BG1T	Isuzu CC-6BG1T	Isuzu AA-6HK1X	
	Rated output	kW/min ⁻¹ (PS/rpm)	106 (144)	125 (170)	177 (241)	
	Fuel tank capacity	L	340	560	560	

<Notes> ● Data is expressed in SI units, followed by reference data in conventional units in ().

● *Does not include attachment weight.